

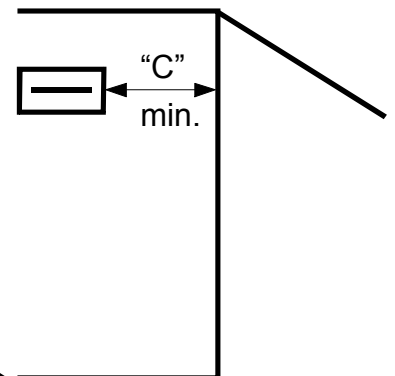


TERM2000 Mindestabstände: "A" Böden, "B" Decken, "C" Seitenwänden

TERM2000 Modelle	Abstände Minimum		
	A [m]	B [m]	C [m]
1,0 kW bis 1,5 kW	1,8	0,15	1,0
1,5 kW bis 2,0 kW	2,1	0,15	1,0
3,0 kW bis 3,0 kW	3,0	0,20	1,0
4,0 kW bis 5,0 kW	3,5	0,20	1,0
6,0 kW bis 6,0 kW	4,5	0,30	1,0
7,5 kW bis 10,0 kW	5,0	1,0	1,5
12,0 kW bis 18,0 kW	6,0	1,0	2,0

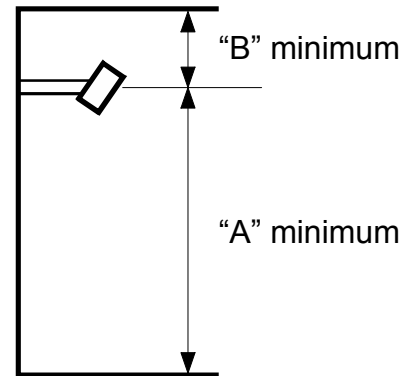

TERM2000 Erwärmungsflächen bei 45° Anbringungswinkel

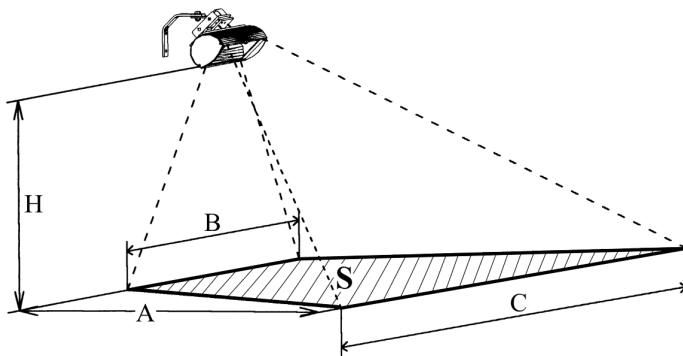

TERM2000 Modelle		Höhe H [m]	Erwärmungs-Dimensionen			
			A [m]	B [m]	C [m]	S [m ²]
	RCA 165 (1,65kW)	1,8	2,7	2,6	4,9	10,1
	RCA 020 (2 kW)	2,1	3,2	3,0	5,8	14,1
	RCB 040 (4 kW)	3,5	4,6	3,6	7,2	24,8
	RCJ 040 (4 kW)	3,5	4,1	4,3	8,4	25,4
	RCC 060 (6 kW)	4,5	5,1	4,0	8,6	32,1
	RCK 060 (6 kW)	4,5	4,4	5,4	9,8	32,6
	RCD 080 (8 kW)	5,0	5,0	4,8	9,6	36,0
	RCM 080 (8 kW)	5,0	5,8	4,2	8,9	36,7
	RCN 100 (10 kW)	5,0	7,1	4,2	9,8	49,7
	RCE 120 (12 kW)	6,0	8,0	4,6	10,8	61,6
	RCL 120 (12 kW)	6,0	5,8	6,6	13,2	57,4
	RCP 120 (12 kW)	6,0	9,5	4,3	10,1	68,4
	RCF 180 (18 kW)	6,0	8,3	6,6	13,4	83,0
	RCS 180 (18 kW)	6,0	12,0	4,4	10,2	87,6